EXISTING EPDM ROOFING SYSTEM | VERSICO ROOFING SYSTEM

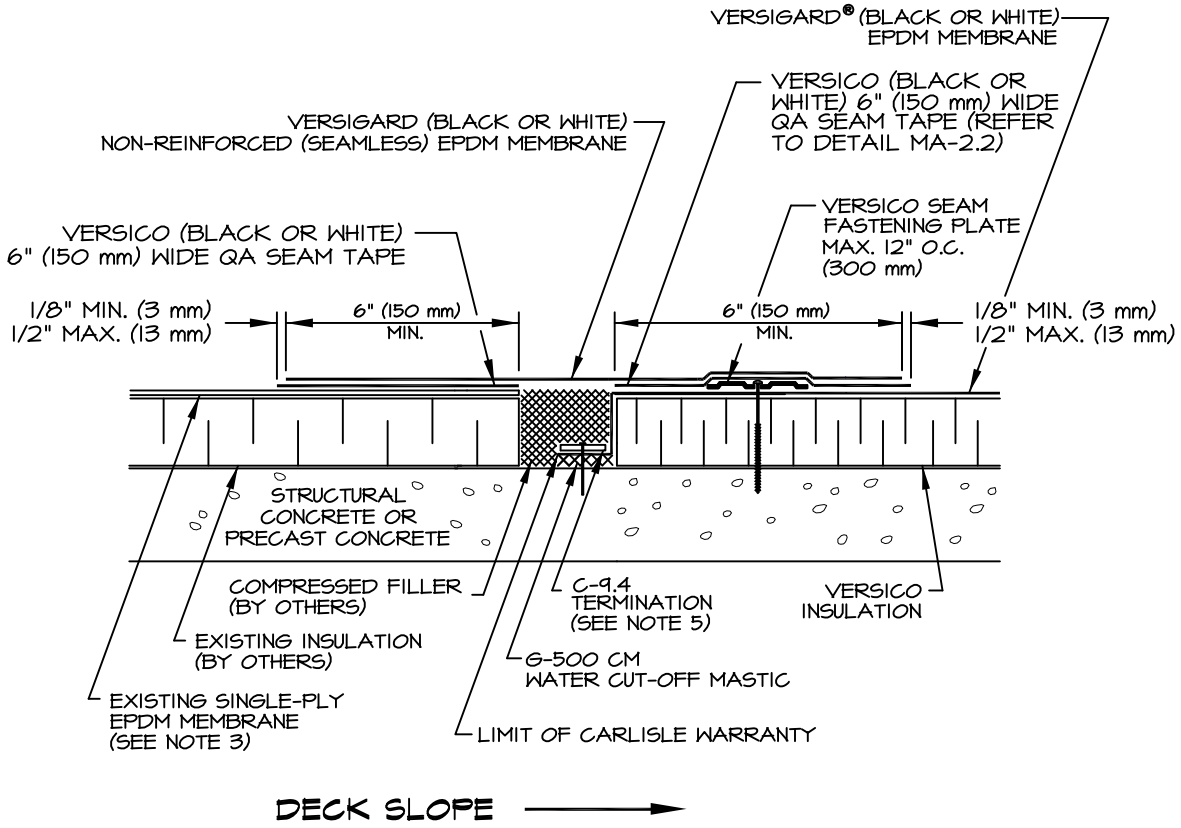

NOTES:

1. DETAIL APPLIES FOR CONCRETE DECKS WHEN **DECK SLOPE IS LEVEL OR IS TOWARD** CARLISLE ROOFING SYSTEM.
2. PRIOR TO SPLICING, CLEAN EXISTING EPDM MEMBRANE BY SCRUBBING THE SPLICE AREA WITH WEATHERED MEMBRANE CLEANER; ALLOW TO DRY.
3. CONTACT MANUFACTURER OF EXISTING EPDM MEMBRANE ROOFING SYSTEM TO VERIFY ACCEPTANCE OF TIE-IN AND TO NOT VOID EXISTING WARRANTY.
4. ON BALLASTED ROOFING SYSTEMS, USE CONCRETE PAVERS TO PREVENT BALLAST MIGRATION. FOR EXISTING BALLASTED SYSTEMS BY OTHERS, CONSULT RESPECTIVE MANUFACTURER FOR ACCEPTABLE GRAVEL CONTAINMENT TO PREVENT GRAVEL MIGRATION.
5. WATER CUT-OFF MASTIC MUST BE HELD UNDER CONSTANT COMPRESSION.

C-13.6

EPDM TIE-IN - CONCRETE DECK

VERSICO ROOFING SYSTEMS

© 2007 VERSICO, LLC