
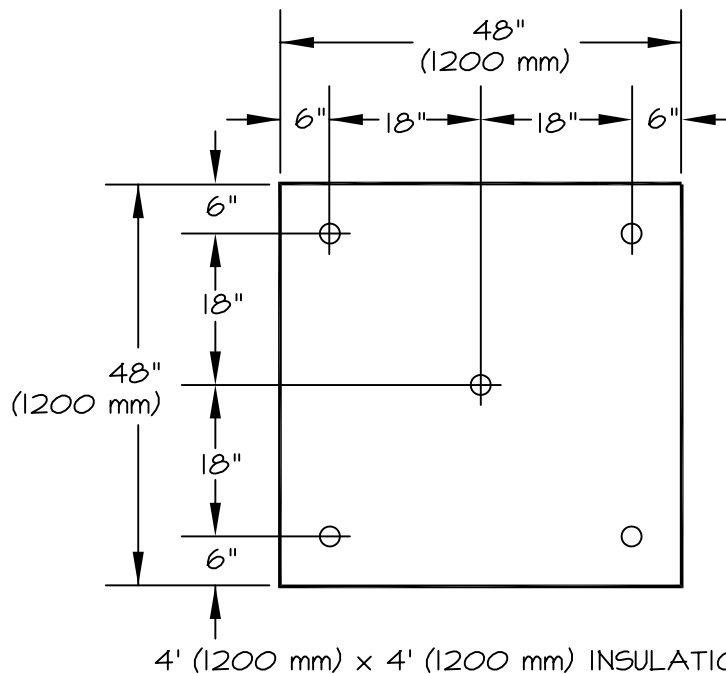


VersiWeld® ADHERED ROOFING SYSTEM

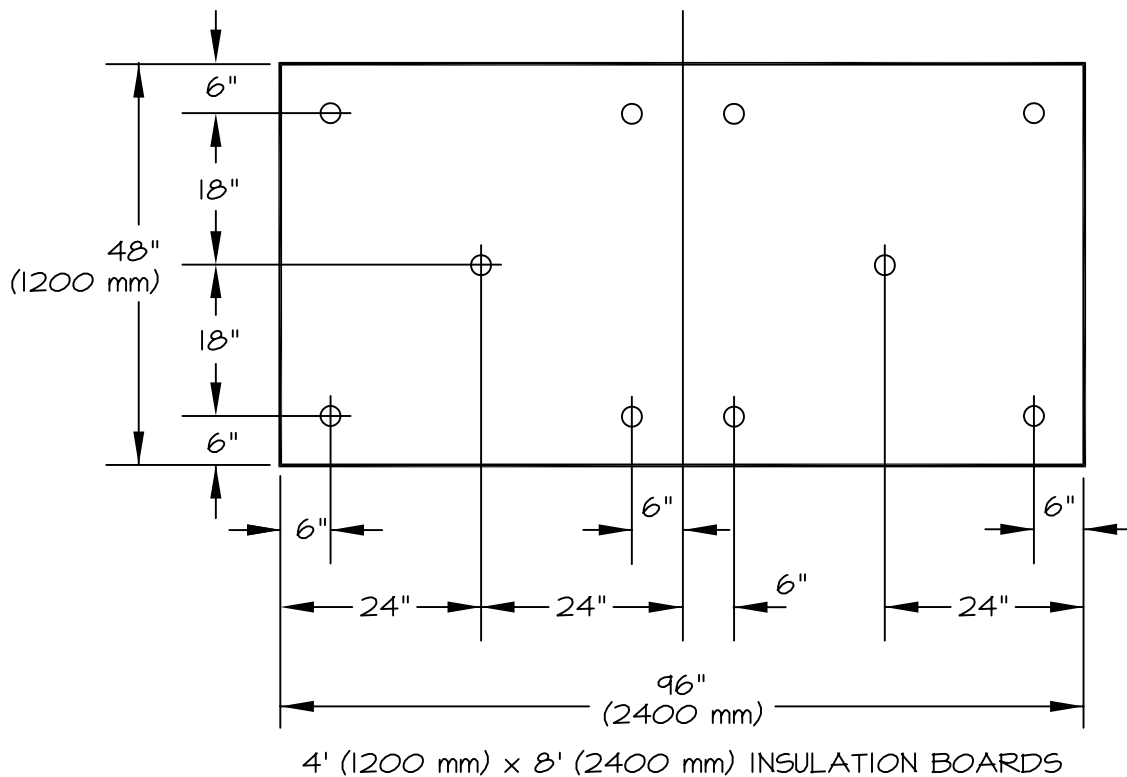

NOTES:

1. VERSICO FASTENERS AND 3" (75 mm) DIAMETER INSULATION FASTENING PLATES MUST BE USED.
2. IF A FACTORY MUTUAL (FM) RATING IS REQUIRED, REFER TO VERSICO'S VERSIWELD CODE APPROVAL GUIDE FOR FASTENER REQUIREMENTS AND MINIMUM INSULATION THICKNESS.

VNA-27.4

MINIMUM 1-1/2" (40 mm) THICK VERSICO
POLYISOCYANURATE INSULATION ATTACHMENT

VERSICO
INCORPORATED



A subsidiary of Carlisle SynTec Incorporated
© 2006 VERSICO INCORPORATED