
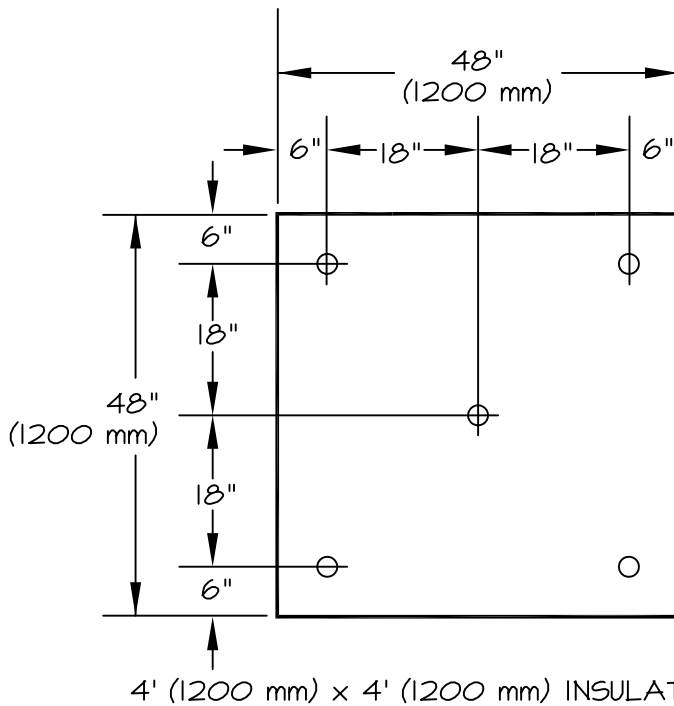


VersiWeld® ADHERED ROOFING SYSTEM

REROOF/NO TEAR-OFF PROJECTS ONLY -
MAXIMUM ROOF HEIGHT OF 40' (12 meters)

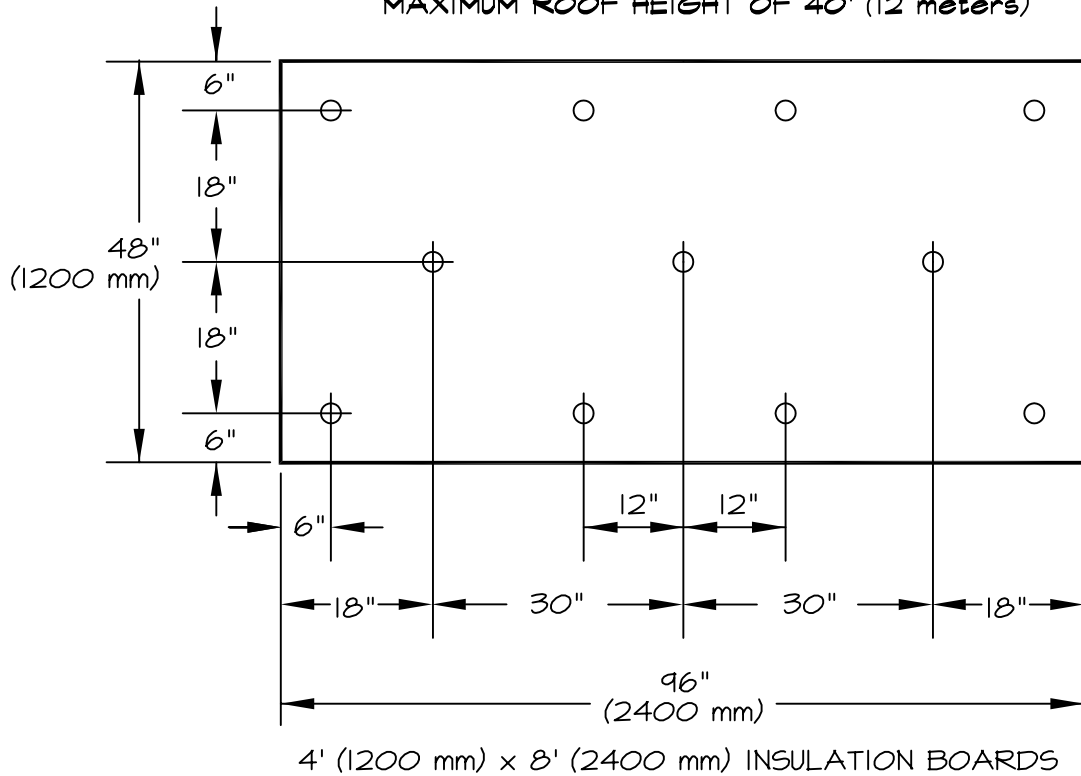

NOTES:

1. IF A FACTORY MUTUAL (FM) RATING IS REQUIRED, REFER TO VERSICO'S VERSIWELD CODE APPROVAL GUIDE FOR FASTENER REQUIREMENTS AND MINIMUM INSULATION THICKNESS.
2. INSULATION ATTACHMENT APPROVED FOR STANDARD 5 OR 10-YEAR WARRANTY AND BASIC WIND SPEED COVERAGE.
3. THIS INSULATION ATTACHMENT IS NOT FOR USE ON CEMENTITIOUS WOOD FIBER OR GYPSUM DECKS.

VWA-27.5

VERSICO INSULATION
FOR REROOF / NO TEAR-OFF PROJECTS

VERSICO
INCORPORATED



A subsidiary of Carlisle SynTec Incorporated
© 2006 VERSICO INCORPORATED