


EXISTING BUILT-UP ROOF

VERSICO ROOFING SYSTEM

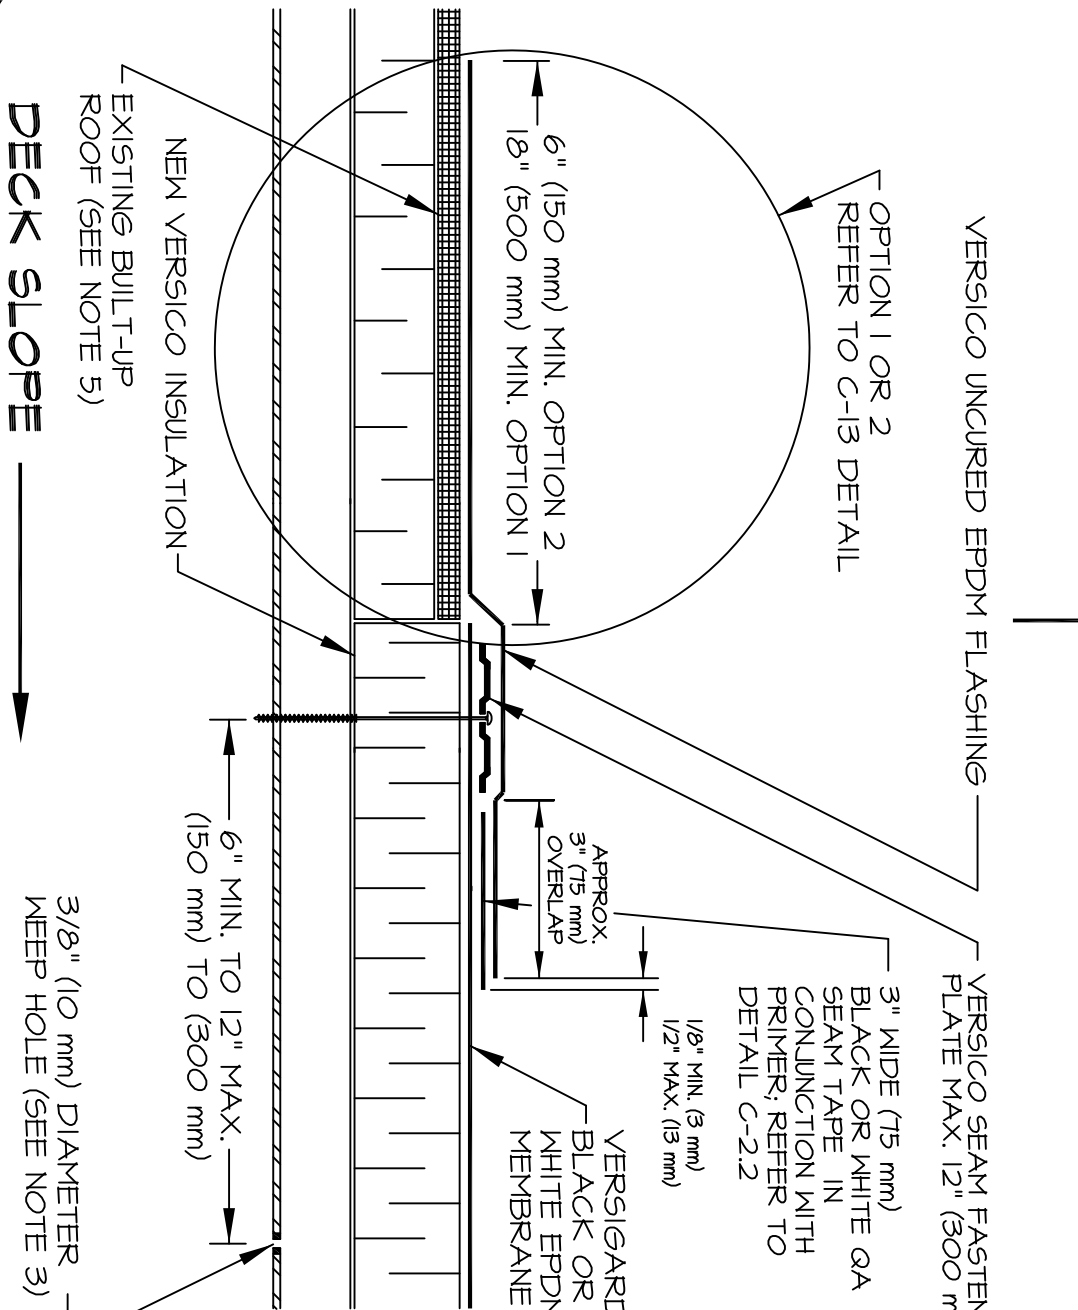

- NOTES:
1. DETAIL APPLIES FOR STEEL DECKS WHEN **DECK SLOPE IS LEVEL OR IS TOWARD** VERSICO ROOFING SYSTEM.
 2. ON BALLASTED ROOFING SYSTEMS, USE CONCRETE PAVERS TO PREVENT BALLAST MIGRATION.
 3. DRILL A 3/8" (10 mm) DIAMETER WEEP HOLE ON THE BOTTOM FLUTES OF THE STEEL DECK ALONG THE PERIMETER TO THE TIE-IN 6" (150 mm) MINIMUM TO 12" (300 mm) MAXIMUM FROM THE SEAM FASTENING PLATE.
 4. POLYMER SEAM PLATES ARE REQUIRED IN LIEU OF SEAM FASTENING PLATES FOR MECHANICALLY ATTACHED ROOFING SYSTEMS OVER STEEL DECKS.
 5. REMOVE ALL GRAVEL AT TIE-IN.

C-13.4
BUILT-UP ROOF TIE IN -- STEEL DECK

