


4' (1200 mm) x 8' (2400 mm) INSULATION BOARDS

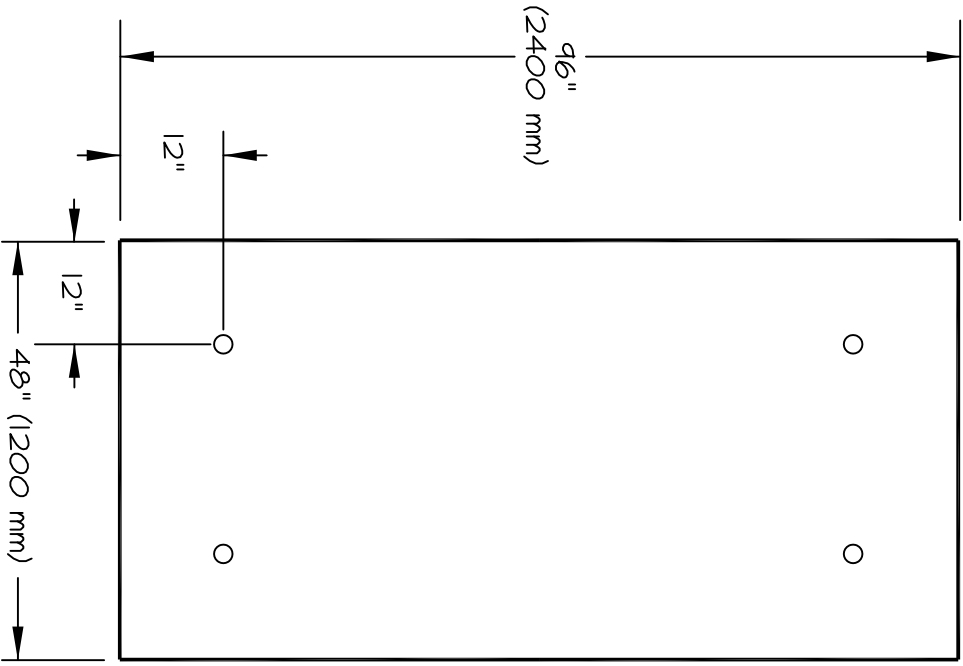


INSULATION FASTENING PATTERN NOT FOR USE WITH DuraPink INSULATION, REFER TO DETAIL MFS-27-C

4' (1200 mm) x 4' (1200 mm) INSULATION BOARDS

IF A FACTORY MUTUAL (FM) RATING IS NOT REQUIRED, THE FOLLOWING TOLERANCE ON DIMENSIONS BETWEEN FASTENERS ARE PERMITTED.

DIMENSIONS SHOWN ON DRAWING	PERMITTED TOLERANCES
12" (300 mm)	± 1" (25 mm)

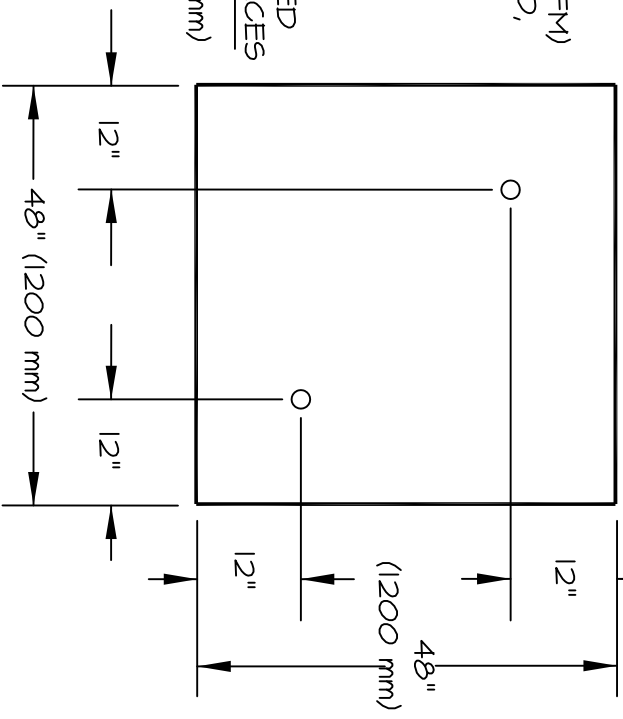

NOTES:

- FOR CRITERIA ON INSULATION FASTENERS AND PLATES, SEE SPECIFICATIONS.
- SEAM FASTENING PLATES MAY BE USED IN LIEU OF INSULATION FASTENING PLATES FOR INSULATION ATTACHMENT ON THIS SYSTEM ONLY.
- WHEN VERSICO POLYISOCYANURATE INSULATION WITH A THICKNESS LESS THAN 1.5" (40 mm) IS INSTALLED OVER AN EXISTING ROOFING MEMBRANE WITHOUT A TEAROFF, REFER TO DETAIL MA-27.2 FOR FASTENING REQUIREMENTS.

MA-27.1 MECHANICAL ATTACHMENT VERSICO INSULATION/UNDERLAYMENT OR 1/2" (13 mm) THICK DENS-DECK

