

VERSICO'S CAV-GRIP™ LOW-VOC AEROSOL CONTACT ADHESIVE/PRIMER



* Important note: Cylinder, hoses and gun are sold separately.

Overview

CAV-GRIP is a multi-purpose contact adhesive/primer recommended for enhancing the bond of Versico's 725TR. The self-contained spray system delivers a low-pressure web, which allows quick and even coverage without bounce-back. CAV-GRIP is a low-VOC, methylene chloride-free formula.

This unique formula allows tenacious adhesion and quick drying over a wide temperature range. The self-contained spray system consists of 40# pressurized aerosol cylinders with a special attachment for a spray hose and gun.

With proper operation, this system requires no cleanup or maintenance. CAV-GRIP provides a low-cost, quick-and-easy solution for proper installation of 725TR.

Features and Benefits

- Quick application with spray gun
- Fast set-up time (5 minutes), decreasing the wait time for installing 725TR
- Wider temperature range down to 25°F
- Easy cleanup
- Tenacious bond
- FM approvals
- Coverage rate of 2,500-3,000 square feet per cylinder

Installation

Connect gun to hose and connect hose to cylinder. Use plumber's tape on all fittings and be careful not to cross-thread them. Open valve on cylinder to check fittings for leaks.

CAV-GRIP can be applied at ambient temperature of 25°F and above. Propellant in cylinders needs to be maintained above 60°F for the product to spray well. Substrate shall be clean, dry and free of debris and contaminants.

For application at ambient temperature below 60°F, store cylinders in heated space and move to project area during application. Cylinders can be kept warm on the jobsite by placing them in a cooler with a heating pad. Otherwise, dispense product from cylinder while it is still warm. When product in cylinder becomes too cold, it will begin to spit rather than spray. At this point, swap cold cylinder for warmer one and return cold cylinder to heated area.

Apply CAV-GRIP in a thin, even coat to substrate, as shown in the drawing on the back page. Avoid high thickness buildup. Keep gun perpendicular to surface during spray.

Allow CAV-GRIP to dry until it does not transfer to finger when touched. Limit application of CAV-GRIP to surfaces that will be covered with Versico's 725TR the same day.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING


Versico, LLC PO Box 1289, Carlisle, PA 17013
Tel: **800.992.7663** Fax: 717.960.4036 Web: **www.versico.com**

CLEANUP: Mineral spirits can be used to clean tools and surfaces. Free stuck valve on gun by attaching hose and gun to cylinder of UN-TACK™ and triggering gun repeatedly until operation is smooth.

STORAGE: Store cylinders in protected, conditioned space with temperature maintained above 60°F. Do not store cylinders in areas where temperature reaches 110°F or higher. Contents are flammable. Store in accordance with local, state and federal regulations. Keep cylinder valve open to maintain pressure in the hose and gun. Periodically spray in a safe manner to help prevent possible clogging. Keep gun trigger locked when not in use.

CYLINDER DISPOSAL: When all primer has been used from cylinder, close cylinder valve and evacuate hose and gun before disconnecting hose from cylinder. If hose is not to be connected to a new cylinder immediately, do not evacuate hose and gun to ensure primer does not harden in gun and hose. Clean up primer residue, gun and spray tips with UN-GRIP 798-ES, mineral spirits or similar solvent. In most areas, the empty cylinder can be disposed of as an aerosol can or recycled as scrap metal. If disposal is not allowed in your area, contact your distributor for disposal arrangements. Federal law forbids transportation if refilled.

Spray Patterns

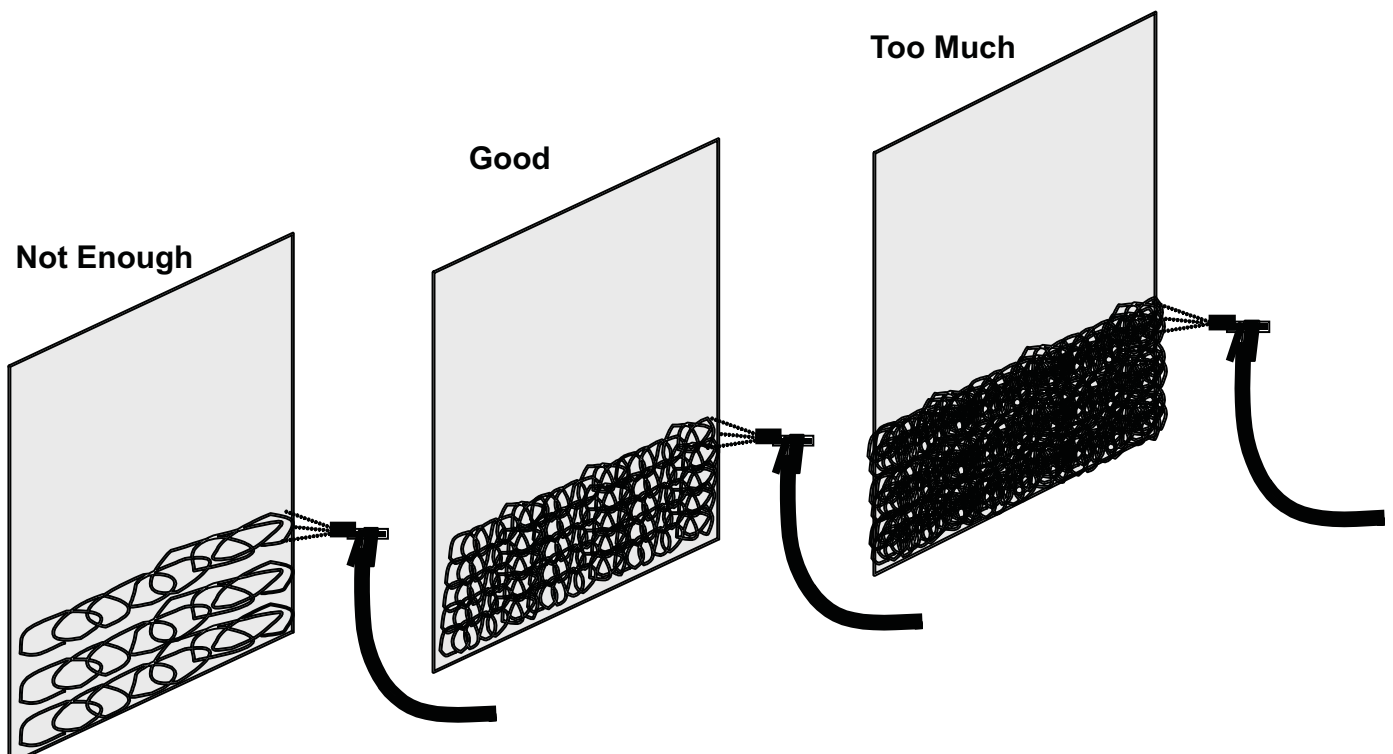

Precautions

Flammable liquid propellant and vapor. Keep away from open flame. Use with adequate ventilation. Avoid inhalation of spray mist or vapors. Harmful or fatal if swallowed. May cause eye irritation. Keep out of reach of children. Review Material Safety Data Sheet for complete safety information prior to use. Use of goggles and gloves required. Aerosol cylinders are not refillable and when empty are harmless and disposable. Dispose according to local codes and laws. Read safety precautions and warnings on cylinder label. Wear gloves and goggles before using this product. Do not aim spray gun at people or animals at any time.

For Industrial Professional Use Only.